

DIGE

CONCEALED SLIDE SERIES

In the name of minimalism, interpret the elegance
of the kitchen.

Embark on a new kitchen and living experience
with the beauty of lines.

Bring distinctive household experience



F Series Wooden drawer
Partial extension concealed runner (with locking device)





Special Features:

- Load capacity: 25kg
- Length: 250-550mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer height adjustment: 0~+3mm





	Partial extension concealed runner (with locking device)		
	Nominal length	Soft-closing drawer Item No.	Syn Push-open drawer Item No.
	250mm	TC301-250F3	TC301-250F7
	300mm	TC301-300F3	TC301-300F7
	350mm	TC301-350F3	TC301-350F7
	400mm	TC301-400F3	TC301-400F7
	450mm	TC301-450F3	TC301-450F7
	500mm	TC301-500F3	TC301-500F7
	550mm	TC301-550F3	TC301-550F7

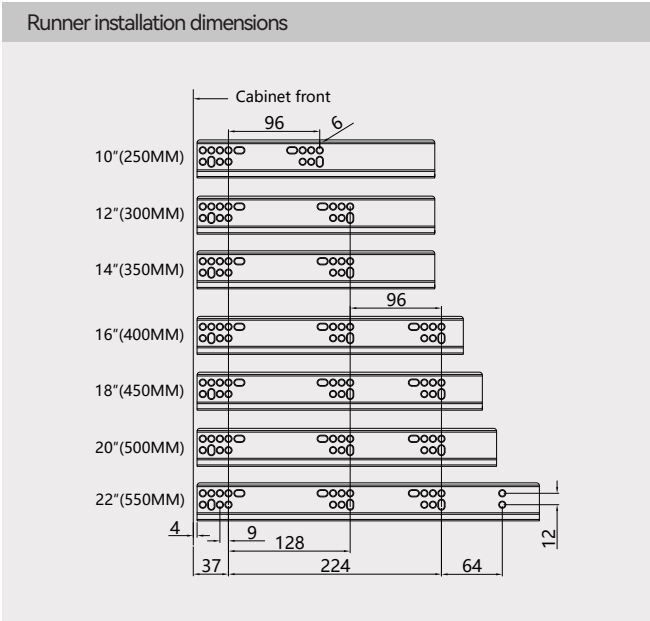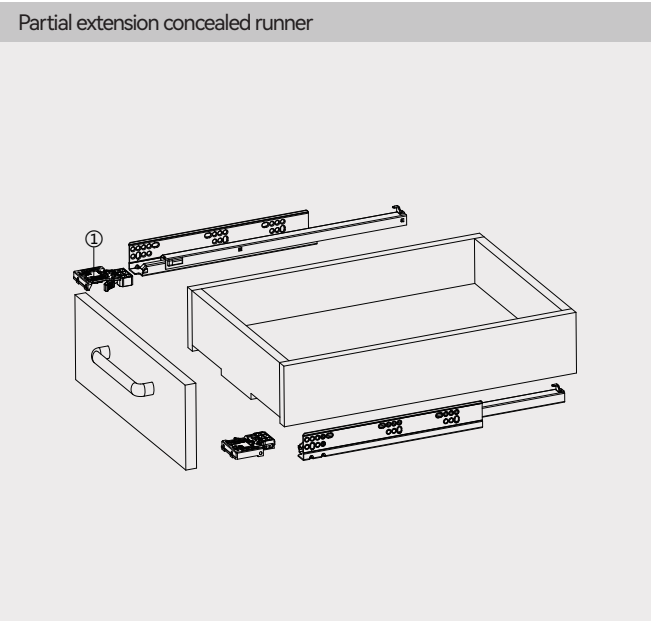


	① Locking device
	Item No.: TC-CL/DF


Runner installation specification (mm)

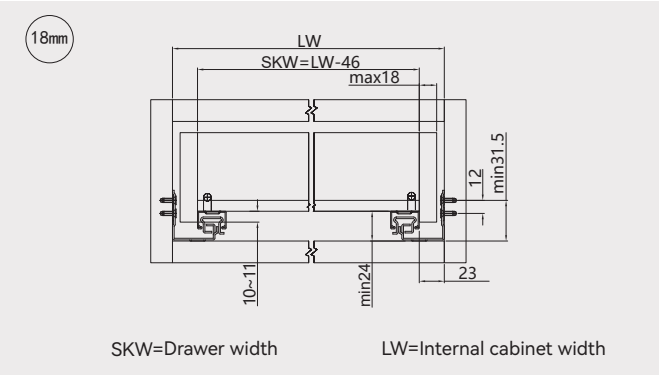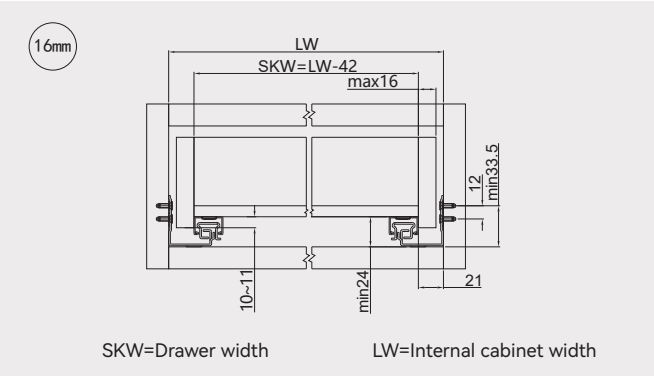


Soft-closing drawer

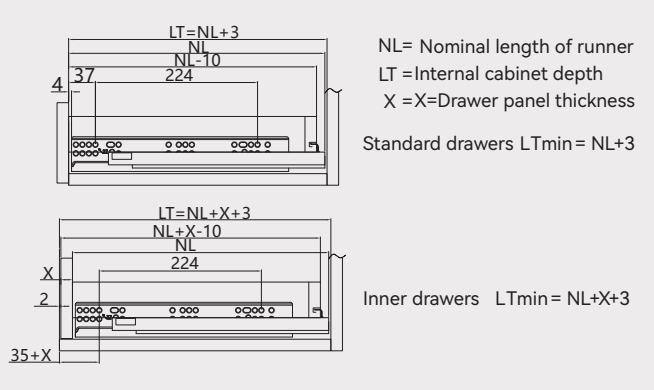


Push-open drawer

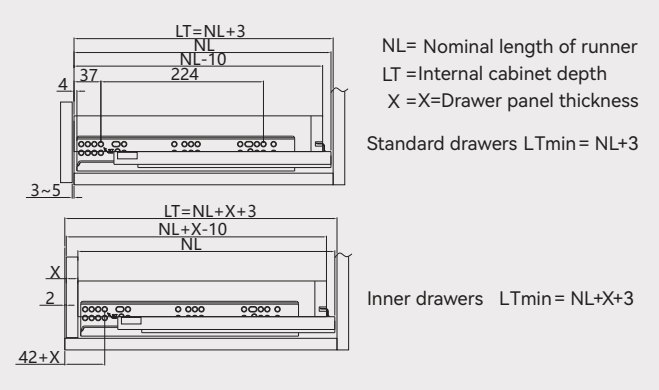

Drilling hole dimensions

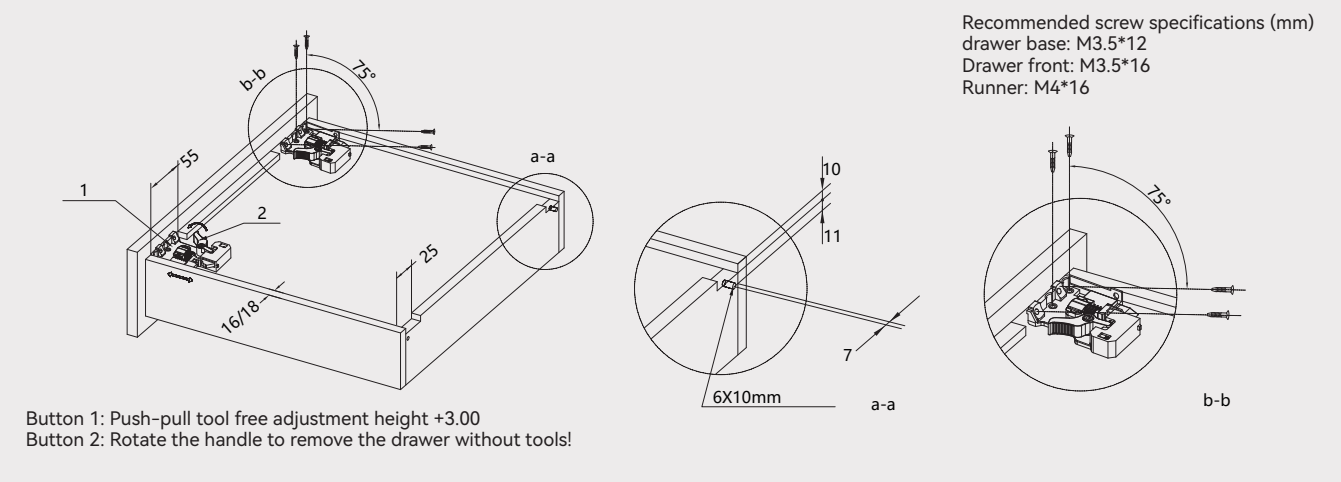

Loss extension length

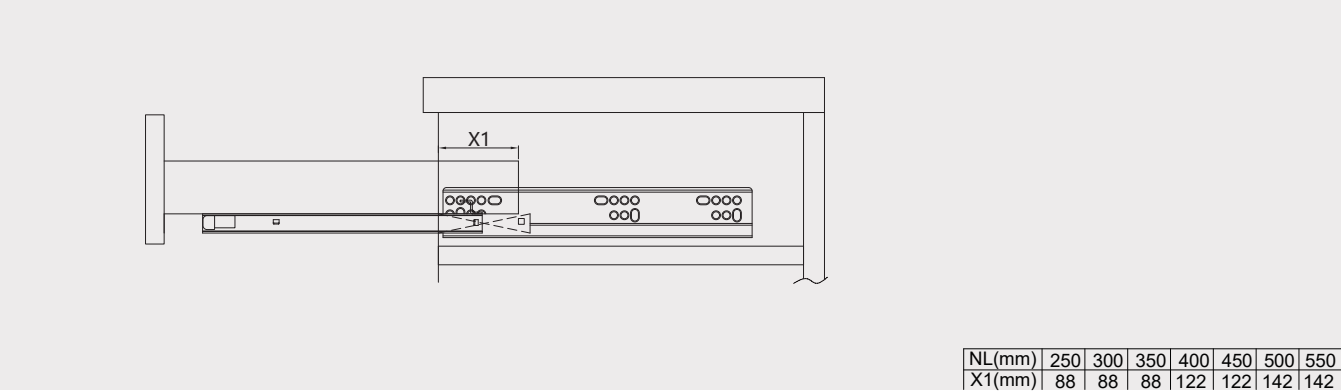

F Series Wooden drawer
Partial extension concealed runner (with peg)




Special Features:


- Load capacity: 25kg
- Length: 250-550mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer height adjustment: 0~+3mm





Partial extension concealed runner (with peg)			
Nominal length			
Soft-closing drawer Item No.			
Syn Push-open drawer Item No.			
250mm	TC301-250F4	TC301-250F8	
300mm	TC301-300F4	TC301-300F8	
350mm	TC301-350F4	TC301-350F8	
400mm	TC301-400F4	TC301-400F8	
450mm	TC301-450F4	TC301-450F8	
500mm	TC301-500F4	TC301-500F8	
550mm	TC301-550F4	TC301-550F8	

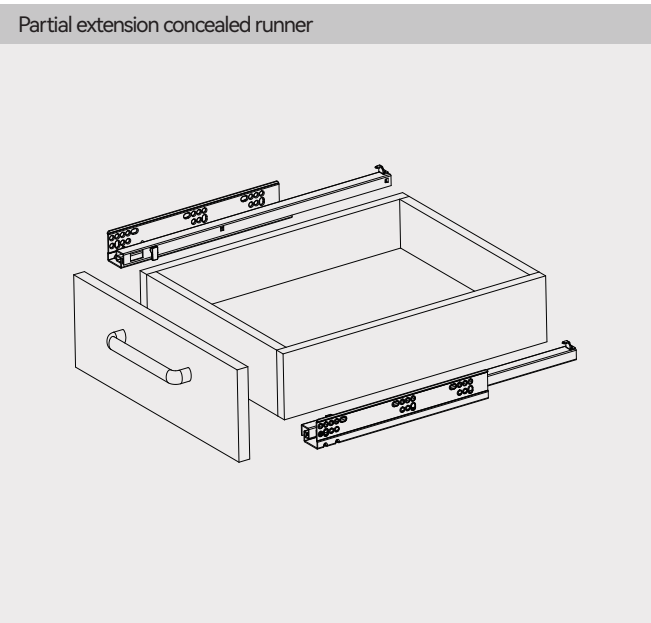


Runner installation dimensions

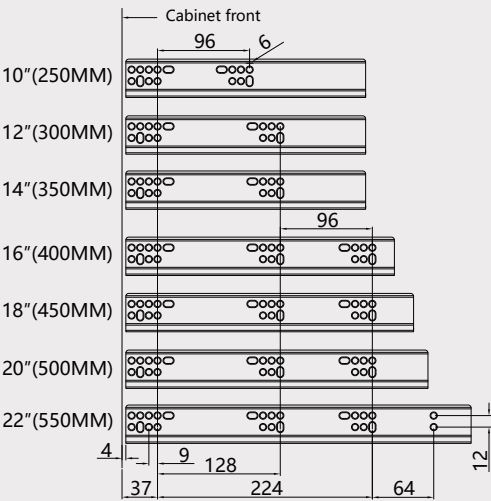


Runner installation specification (mm)

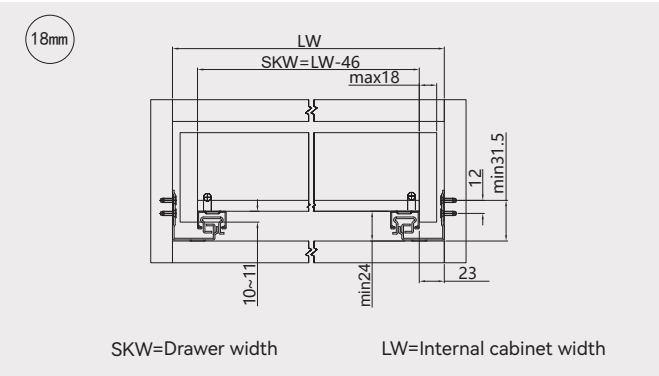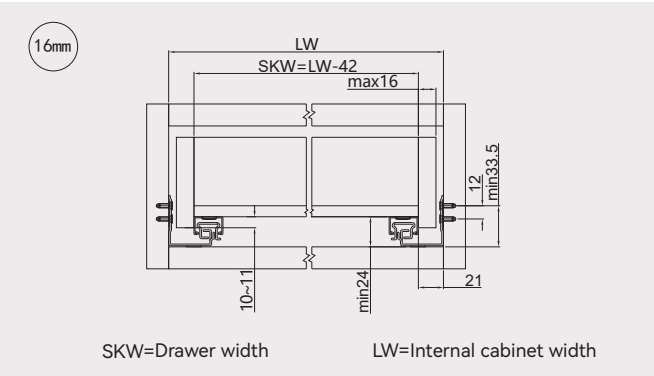


Soft-closing drawer

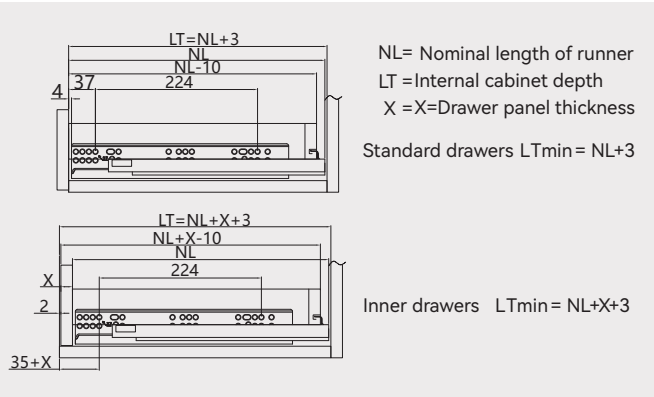


Push-open drawer

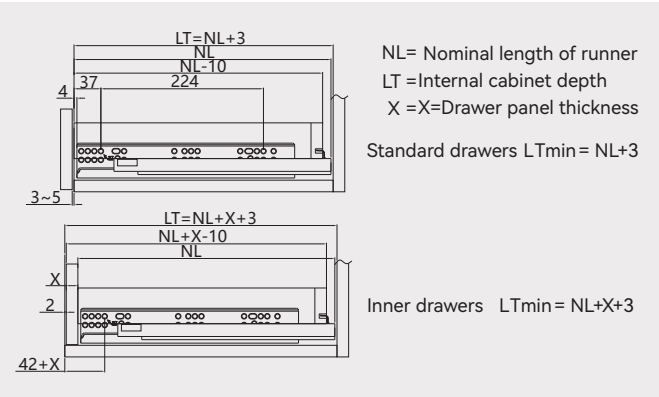

Drilling hole dimensions

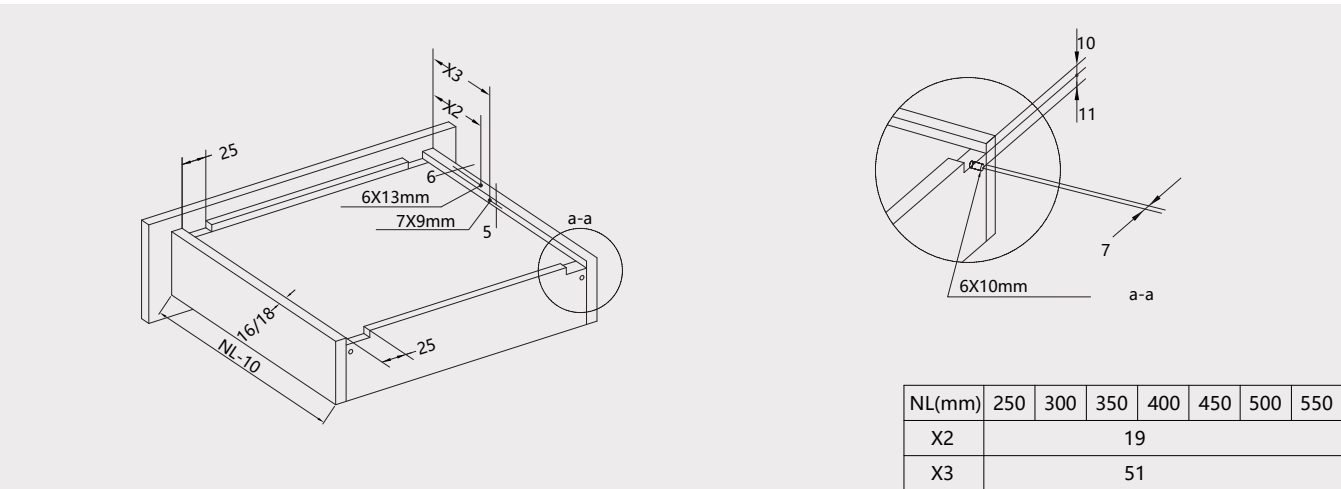

Loss extension length

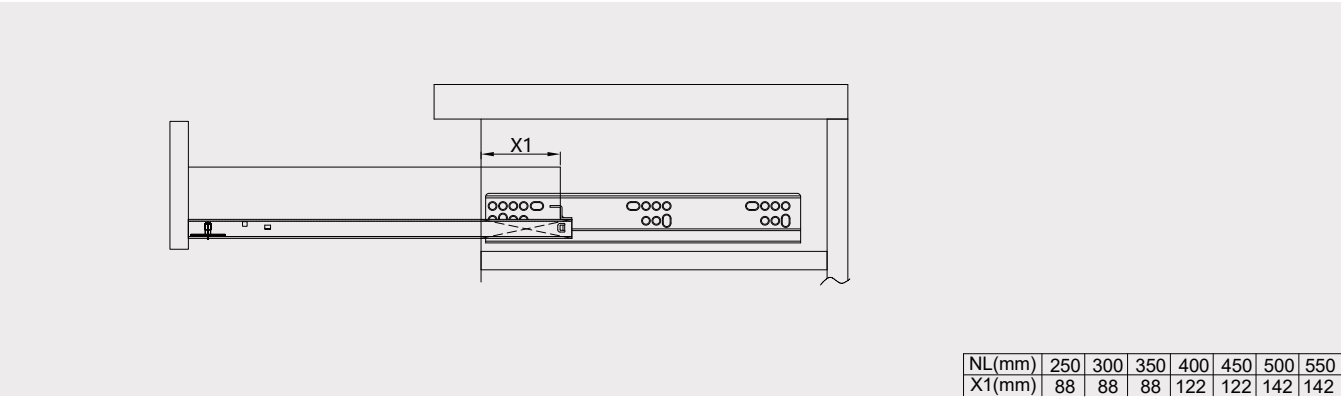

HGE Series Wooden drawer

Synchronized Full extension concealed runner




Special Features:


- Load capacity: 35kg
- Length: 250-650mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer side adjustment:±1.5mm
- Drawer height adjustment:0~+3mm
- Drawer depth adjustment:+2mm



Synchronized Full extension concealed runner Item No.				
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.	
250mm	TC301HGE-250E1	TC301HGE-250E7	TC301HGE-250E7S	
270mm	TC301HGE-270E1	TC301HGE-270E7	TC301HGE-270E7S	
300mm	TC301HGE-300E1	TC301HGE-300E7	TC301HGE-300E7S	
350mm	TC301HGE-350E1	TC301HGE-350E7	TC301HGE-350E7S	
400mm	TC301HGE-400E1	TC301HGE-400E7	TC301HGE-400E7S	
450mm	TC301HGE-450E1	TC301HGE-450E7	TC301HGE-450E7S	
500mm	TC301HGE-500E1	TC301HGE-500E7	TC301HGE-500E7S	
550mm	TC301HGE-550E1	TC301HGE-550E7	TC301HGE-550E7S	
600mm	TC301HGE-600E1	TC301HGE-600E7	TC301HGE-600E7S	
650mm	TC301HGE-650E1	TC301HGE-650E7	TC301HGE-650E7S	


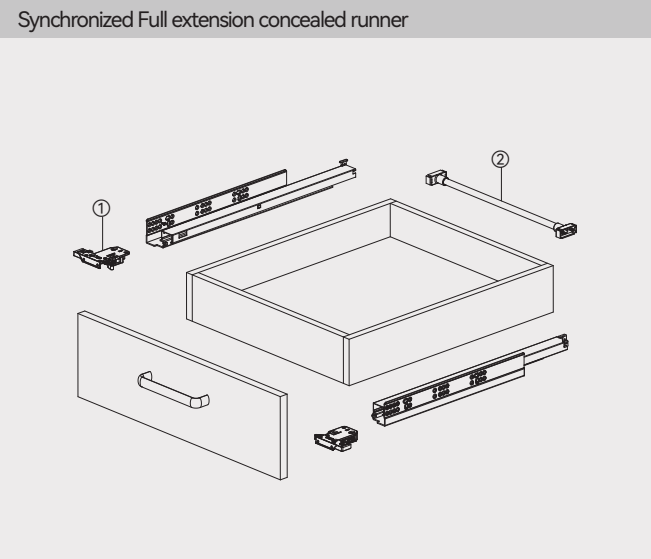


	① Locking device
	Item No.: TC-CL/HGE-3D

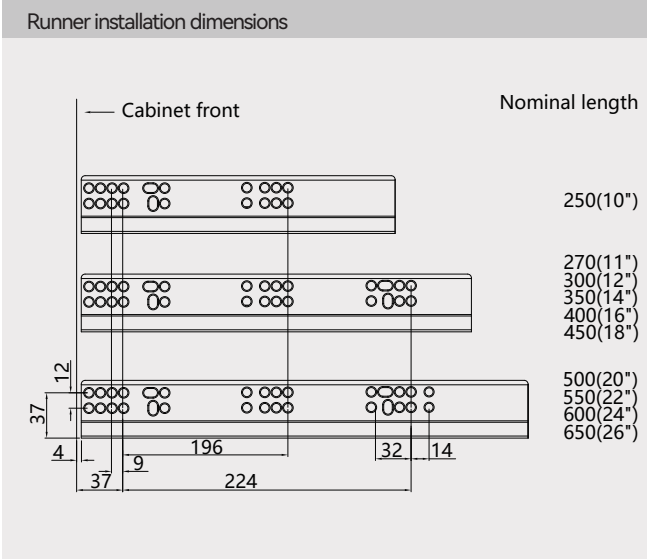


	② Synchronized Push-open aluminum cross bar
	Item No.: TC/AL-E7SN-2000
	MDF 16mm - cutting dimensions=LW-178
	MDF 19mm - cutting dimensions=LW-184


Runner installation specification (mm)

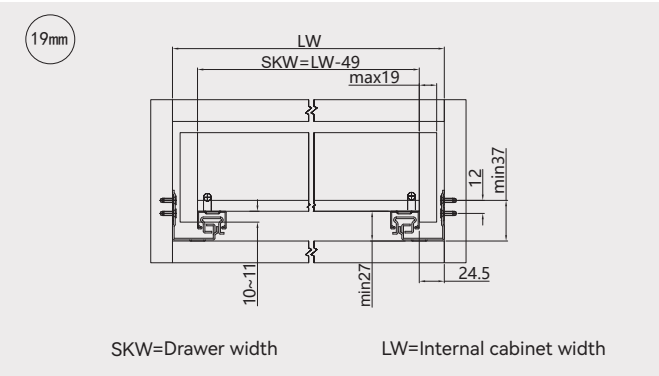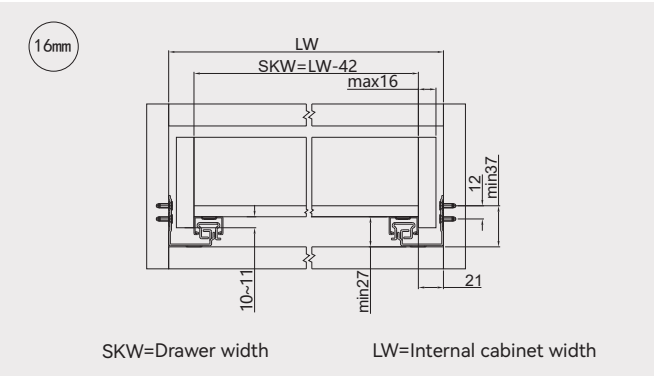



Soft-closing drawer

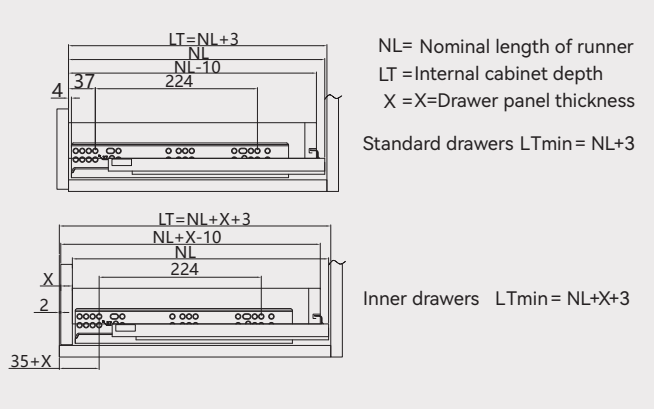

Push-open drawer

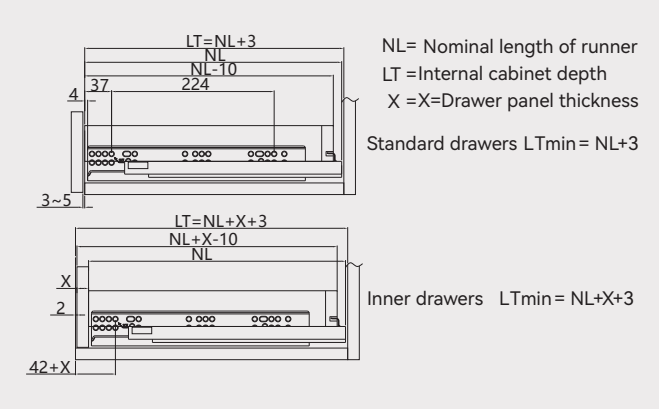

Drilling hole dimensions

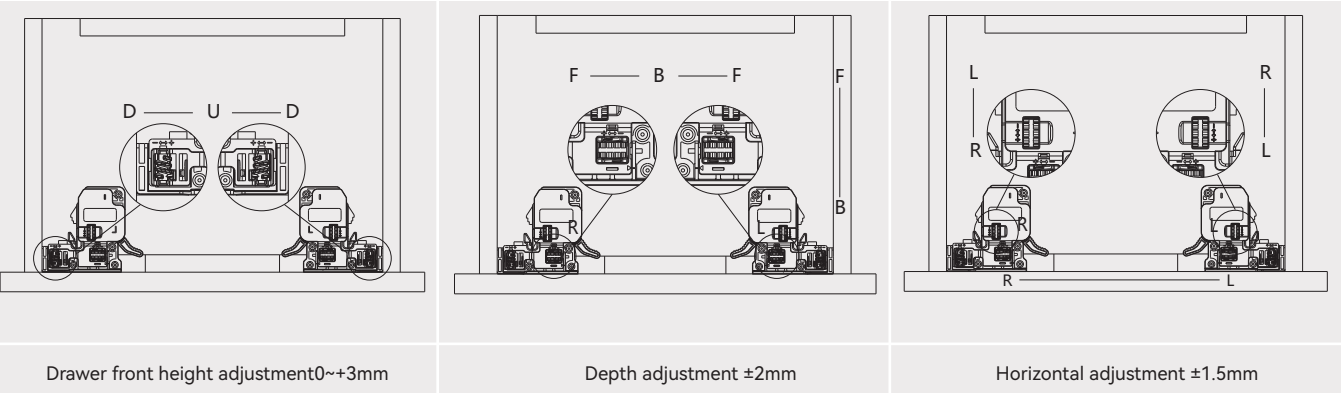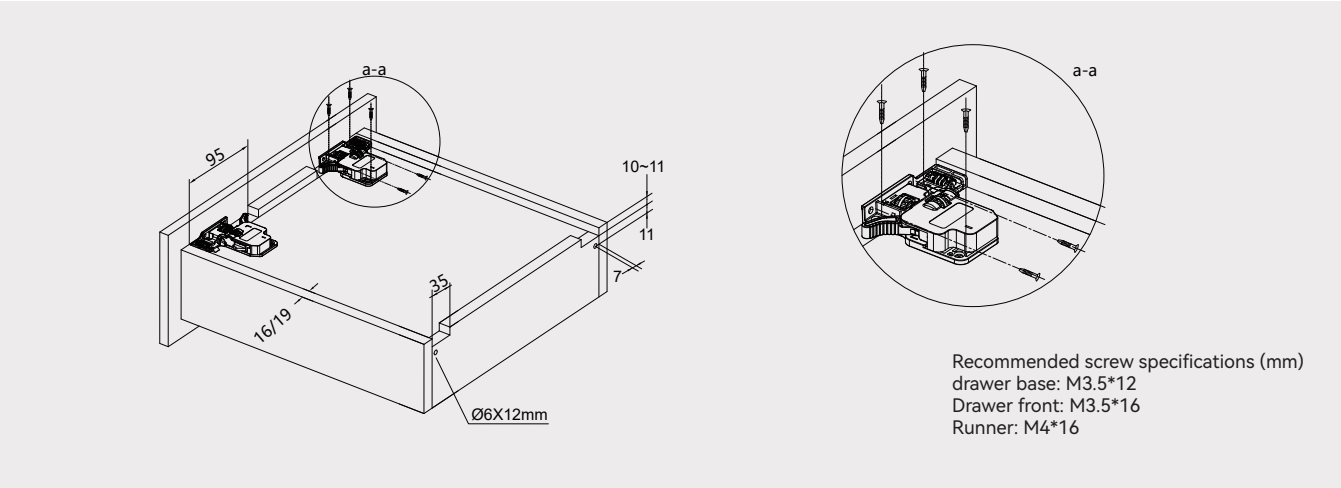

*Side adjustment ±1.5mm (Condition: Drawer width is within tolerance)

DE Series Wooden drawer
Synchronized Full extension concealed runner






Special Features:



- Load capacity: 30kg
- Length: 250-600mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer side adjustment:±1.5mm
- Drawer height adjustment:0~+3mm
- Drawer depth adjustment:+2mm




Synchronized Full extension concealed runner Item No.				
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.	
250mm	TC301HG-250DE1	TC301HG-250DE7	TC301HG-250DE7S	
270mm	TC301HG-270DE1	TC301HG-270DE7	TC301HG-270DE7S	
300mm	TC301HG-300DE1	TC301HG-300DE7	TC301HG-300DE7S	
350mm	TC301HG-350DE1	TC301HG-350DE7	TC301HG-350DE7S	
400mm	TC301HG-400DE1	TC301HG-400DE7	TC301HG-400DE7S	
450mm	TC301HG-450DE1	TC301HG-450DE7	TC301HG-450DE7S	
500mm	TC301HG-500DE1	TC301HG-500DE7	TC301HG-500DE7S	
550mm	TC301HG-550DE1	TC301HG-550DE7	TC301HG-550DE7S	
600mm	TC301HG-600DE1	TC301HG-600DE7	TC301HG-600DE7S	

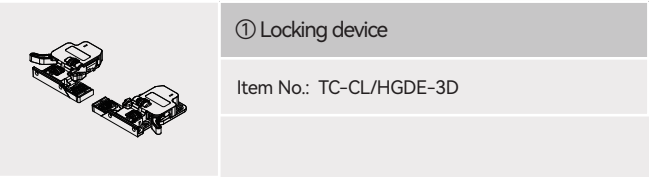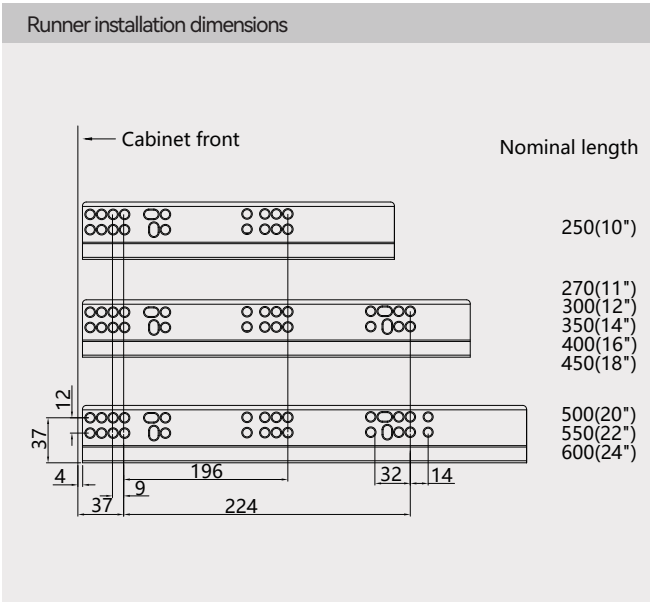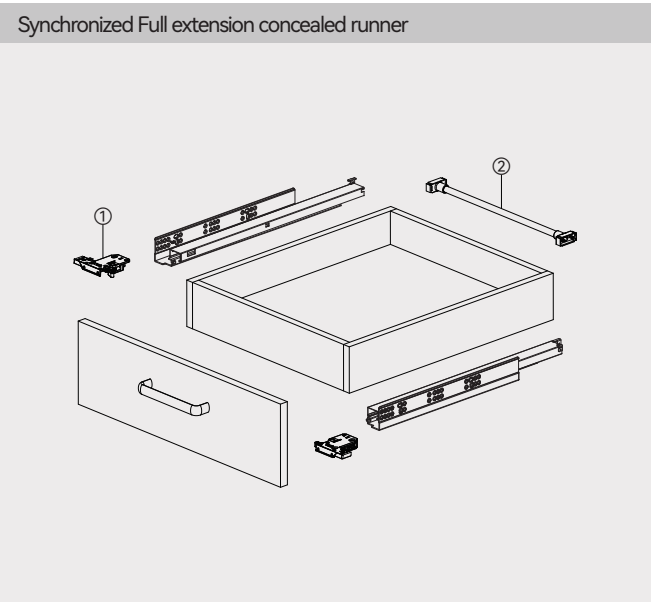


Runner installation specification (mm)

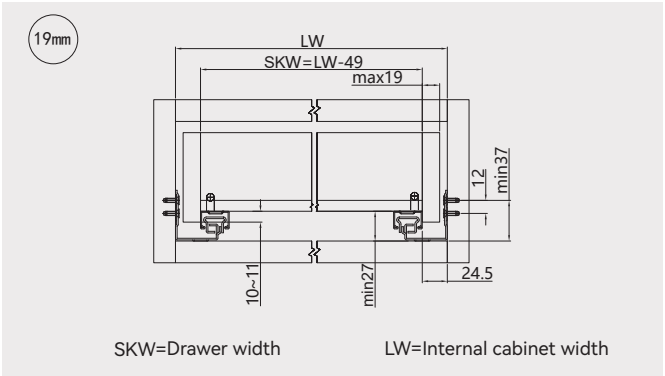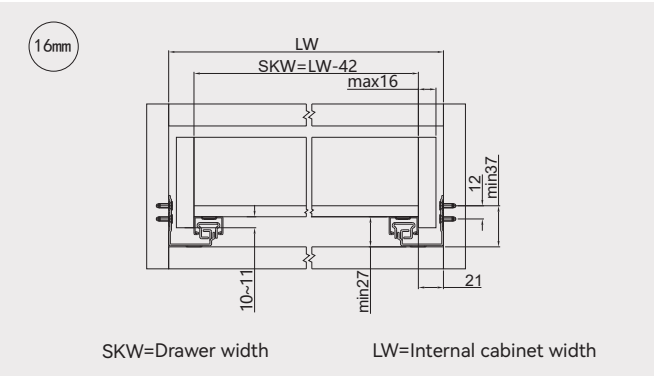



Soft-closing drawer

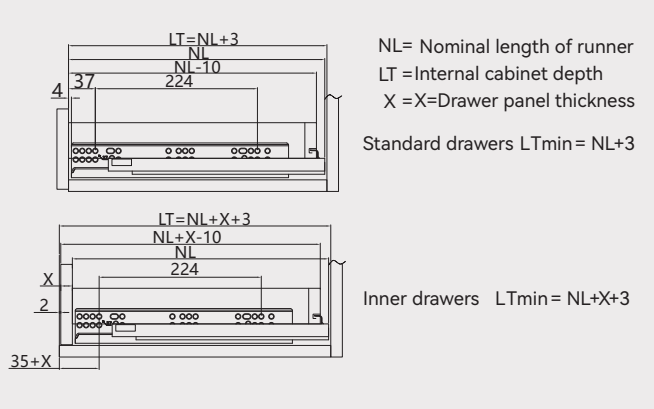

Push-open drawer

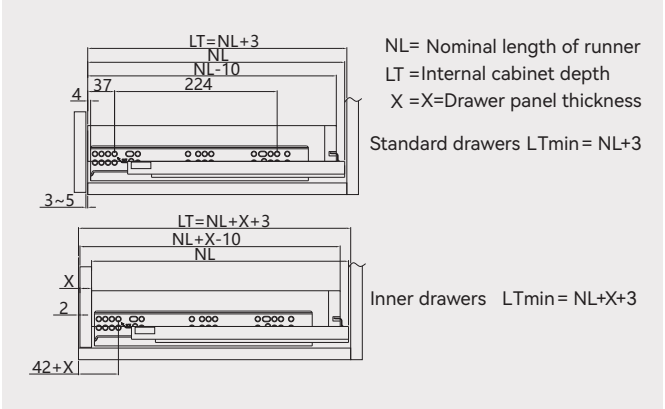

Drilling hole dimensions

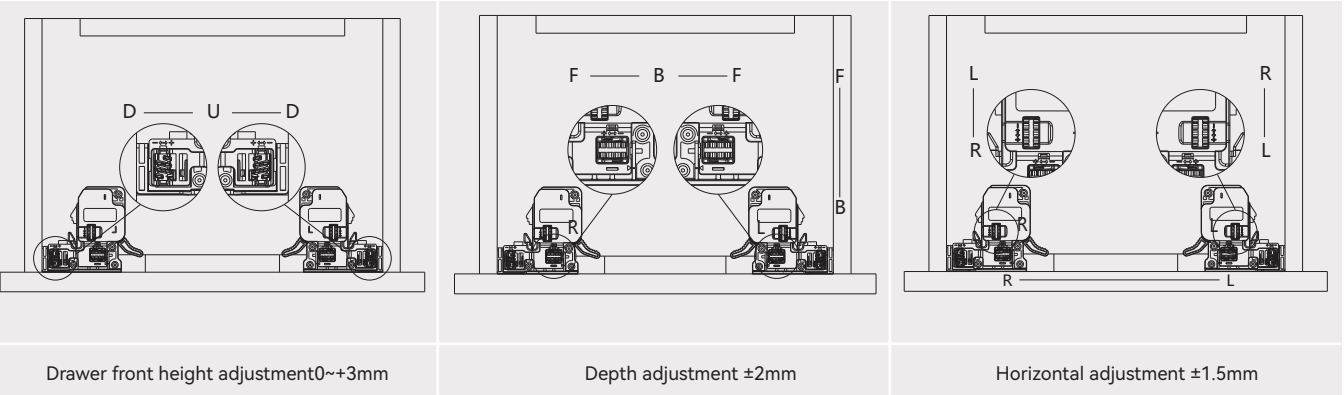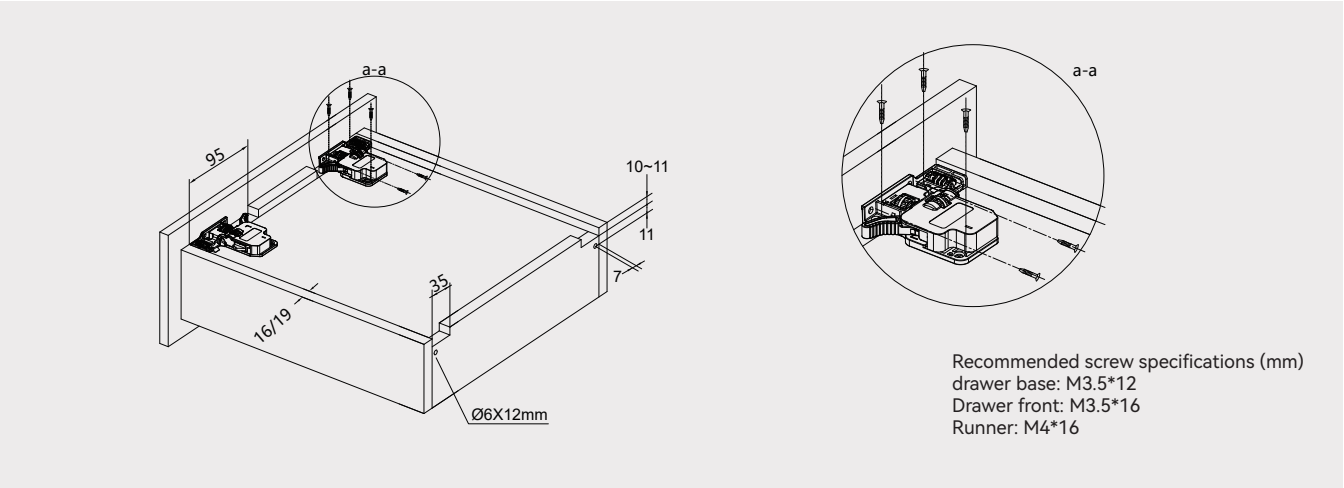

*Side adjustment ±1.5mm (Condition: Drawer width is within tolerance)

HE Series Wooden drawer
Synchronized Full extension concealed runner




Special Features:

- Load capacity: 35kg
- Length: 250-650mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer side adjustment:±1.5mm
- Drawer height adjustment:0~+3mm



Synchronized Full extension concealed runner Item No.				
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.	
250mm	TC301HE-250E1	TC301HE-250E7	TC301HE-250E7S	
270mm	TC301HE-270E1	TC301HE-270E7	TC301HE-270E7S	
300mm	TC301HE-300E1	TC301HE-300E7	TC301HE-300E7S	
350mm	TC301HE-350E1	TC301HE-350E7	TC301HE-350E7S	
400mm	TC301HE-400E1	TC301HE-400E7	TC301HE-400E7S	
450mm	TC301HE-450E1	TC301HE-450E7	TC301HE-450E7S	
500mm	TC301HE-500E1	TC301HE-500E7	TC301HE-500E7S	
550mm	TC301HE-550E1	TC301HE-550E7	TC301HE-550E7S	
600mm	TC301HE-600E1	TC301HE-600E7	TC301HE-600E7S	
650mm	TC301HE-650E1	TC301HE-650E7	TC301HE-650E7S	


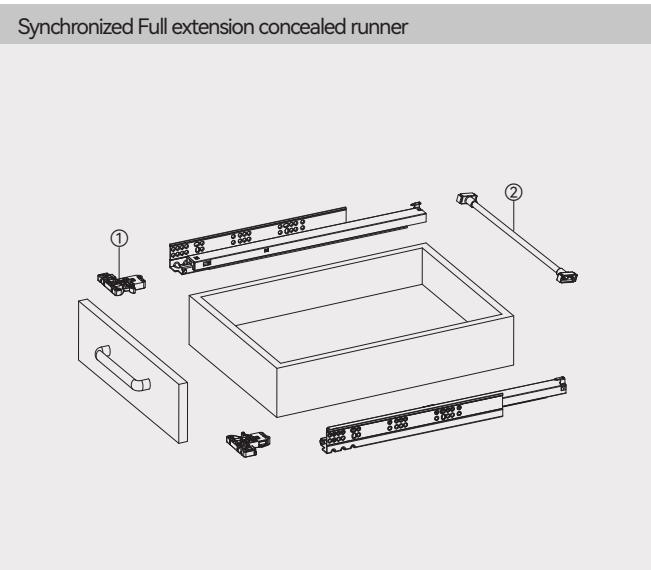


	① Locking device
	Item No.: TC-CL/HEDG


Runner installation dimensions	
	Nominal length
	— Cabinet front
	250(10")
	270(11")
	300(12")
	350(14")
	400(16")
	450(18")
	500(20")
	550(22")
	600(24")
	650(26")

	② Synchronized Push-open aluminum cross bar
	Item No: TC/AL-E7SN-2000
	MDF 16mm - cutting dimensions=LW-174
	MDF 19mm - cutting dimensions=LW-180


Runner installation specification (mm)

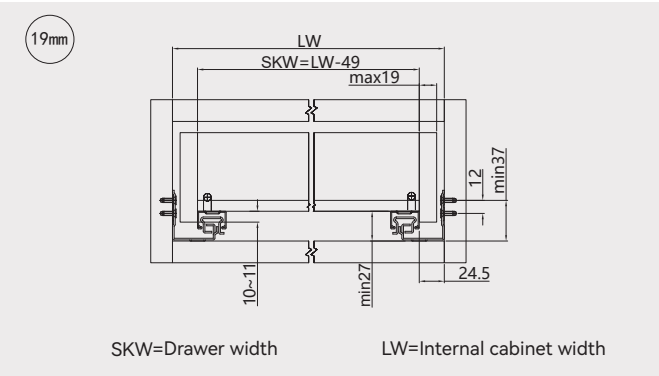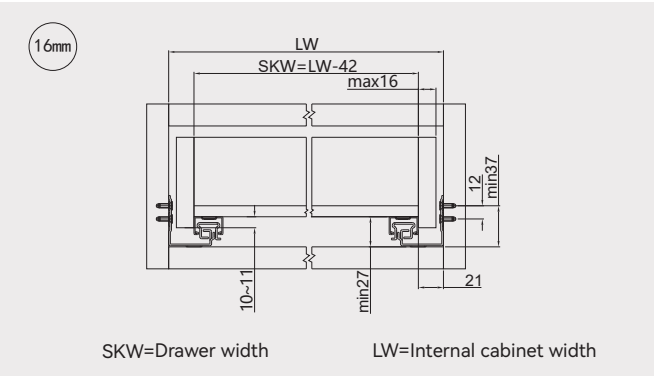


Soft-closing drawer

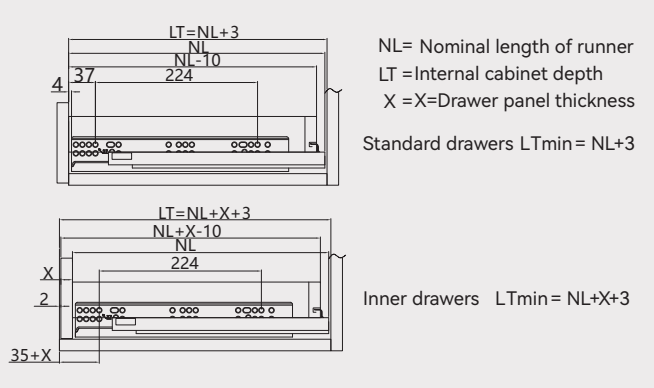

Push-open drawer

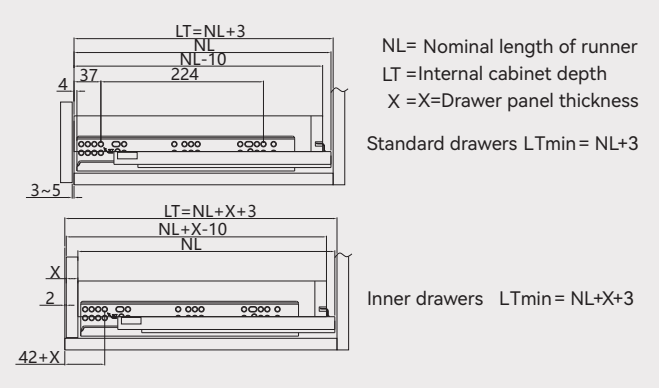

Drilling hole dimensions

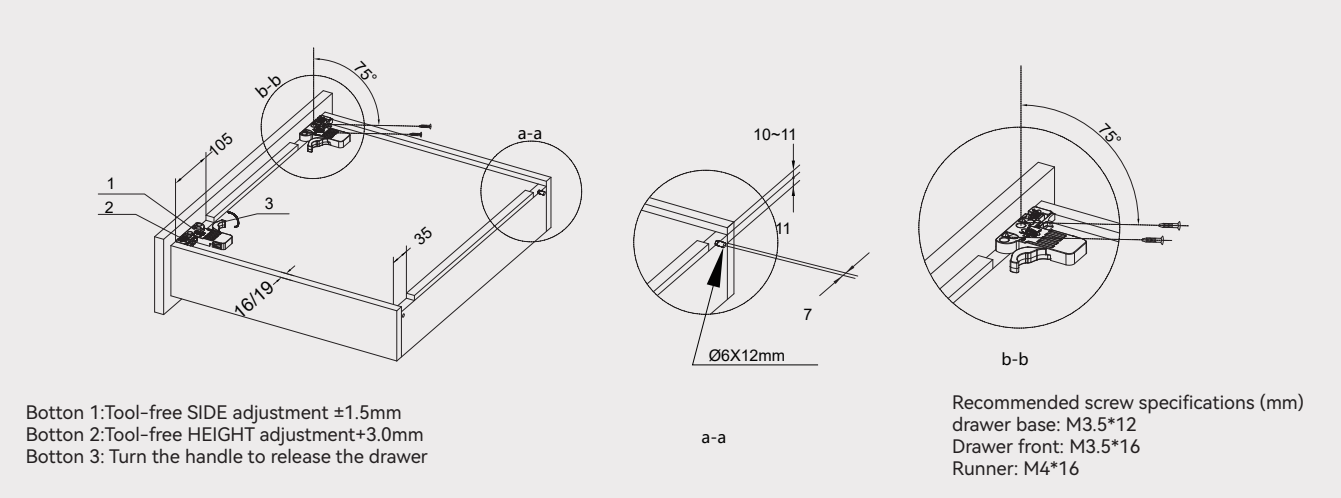


E Series Wooden drawer

Full extension concealed runner (with locking device)




Special Features:

- Load capacity: 35kg
- Length: 250-550mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer height adjustment: 0~+3mm

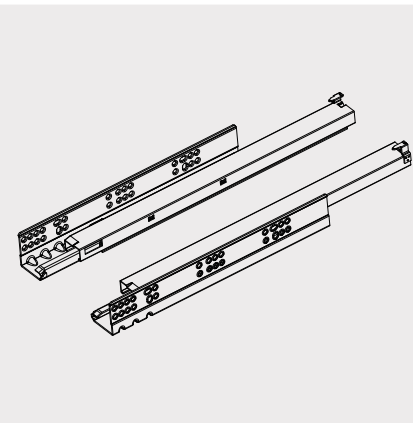

Full extension concealed runner (with locking device)			
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.
250mm	TC301-250E1	TC301-250E7	TC301-250E7S
270mm	TC301-270E1	TC301-270E7	TC301-270E7S
300mm	TC301-300E1	TC301-300E7	TC301-300E7S
350mm	TC301-350E1	TC301-350E7	TC301-350E7S
400mm	TC301-400E1	TC301-400E7	TC301-400E7S
450mm	TC301-450E1	TC301-450E7	TC301-450E7S
500mm	TC301-500E1	TC301-500E7	TC301-500E7S
550mm	TC301-550E1	TC301-550E7	TC301-550E7S


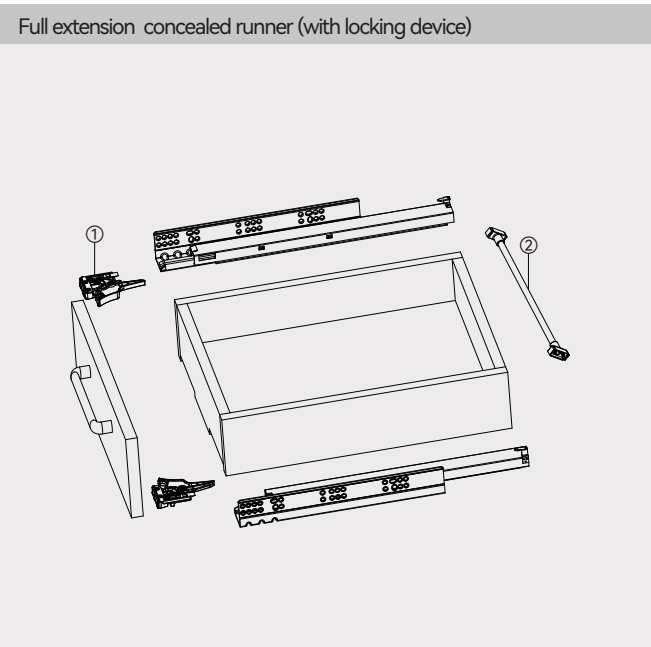


	① Locking device
	Item No.: TC-CL/TE



Runner installation dimensions	
	Nominal length
	250(10")
	270(11")
	300(12")
	350(14")
	400(16")
	450(18")
	500(20")
	550(22")

	② Synchronized Push-open aluminum cross bar
	Item No.: TC/AL-E7SN-2000
	MDF 16mm - cutting dimensions=LW-174
	MDF 19mm - cutting dimensions=LW-180


Runner installation specification (mm)

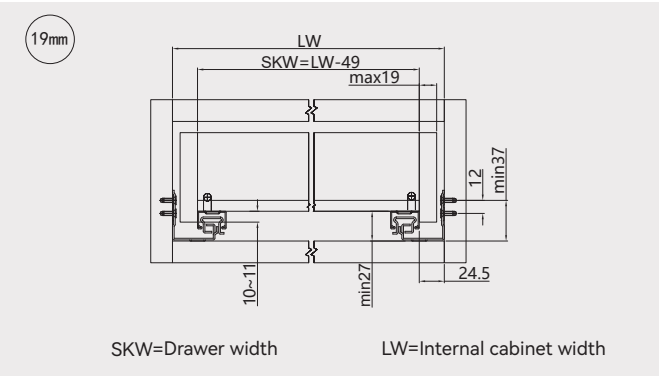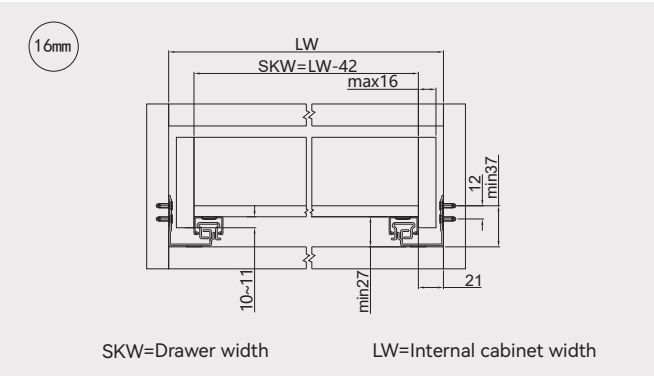

Soft-closing drawer

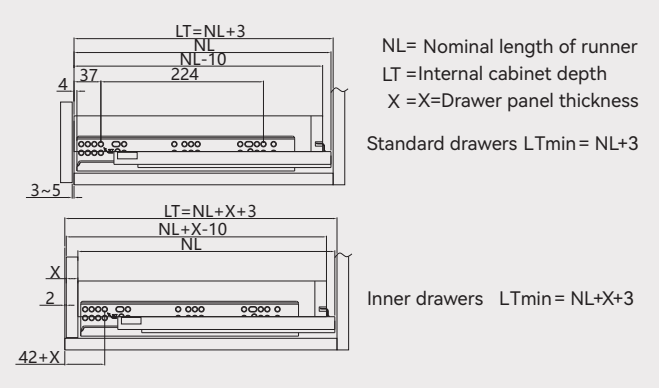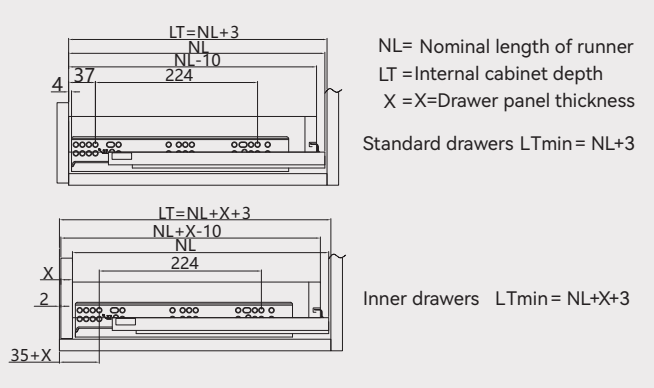

Drilling hole dimensions

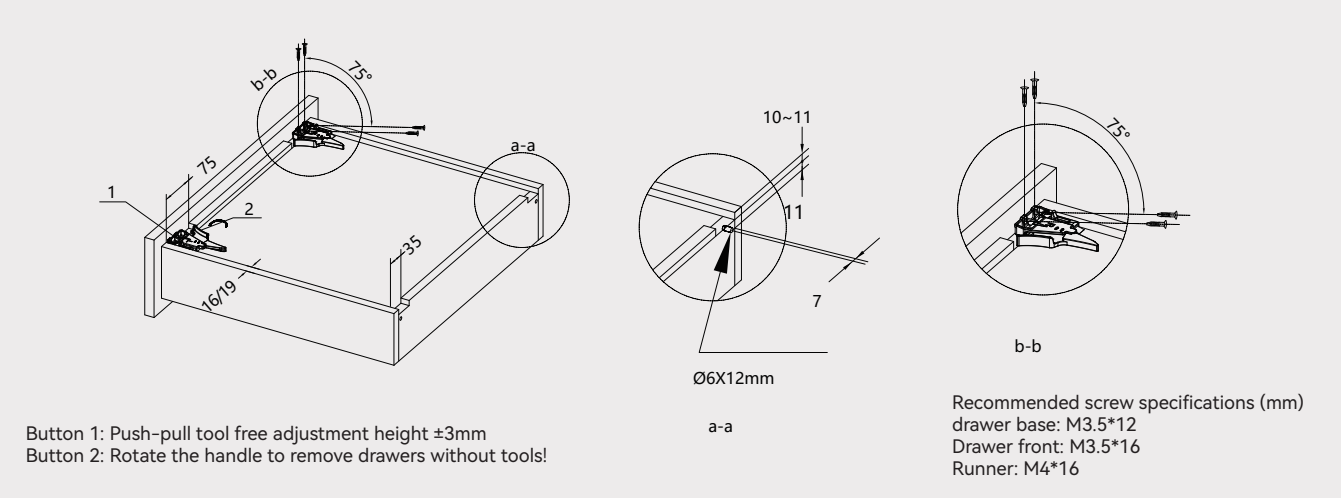


E Series Wooden drawer

Full extension concealed runner (with locking peg)





Special Features:


- Load capacity: 35kg
- Length: 250-550mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer height adjustment: 0~+3mm

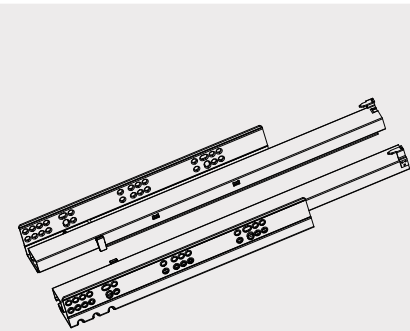



Full extension concealed runner (with locking peg)			
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.
250mm	TC301-250E2	TC301-250E8	TC301-250E8S
270mm	TC301-270E2	TC301-270E8	TC301-270E8S
300mm	TC301-300E2	TC301-300E8	TC301-300E8S
350mm	TC301-350E2	TC301-350E8	TC301-350E8S
400mm	TC301-400E2	TC301-400E8	TC301-400E8S
450mm	TC301-450E2	TC301-450E8	TC301-450E8S
500mm	TC301-500E2	TC301-500E8	TC301-500E8S
550mm	TC301-550E2	TC301-550E8	TC301-550E8S

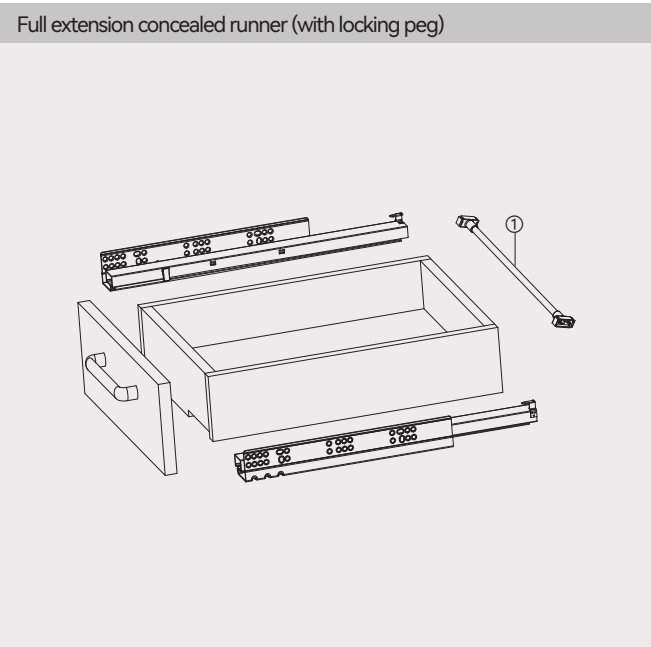



① Synchronized Push-open aluminum cross bar	MDF 16mm - cutting dimensions=LW-174
Item No.: TC/AL-E7SN-2000	MDF 19mm - cutting dimensions=LW-180

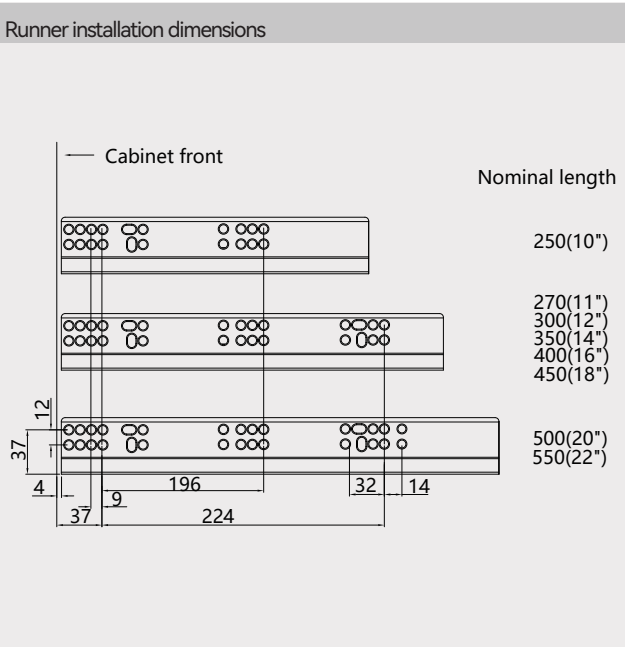


Runner installation specification (mm)

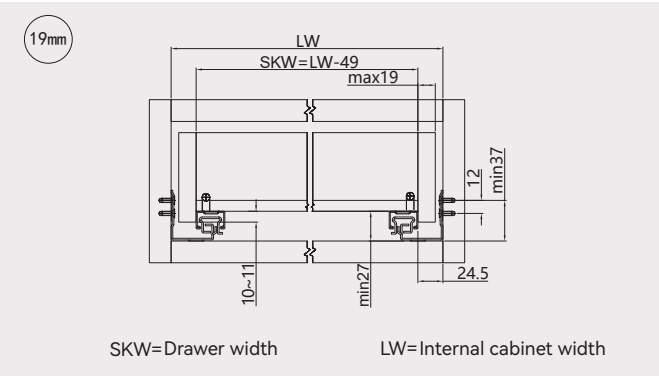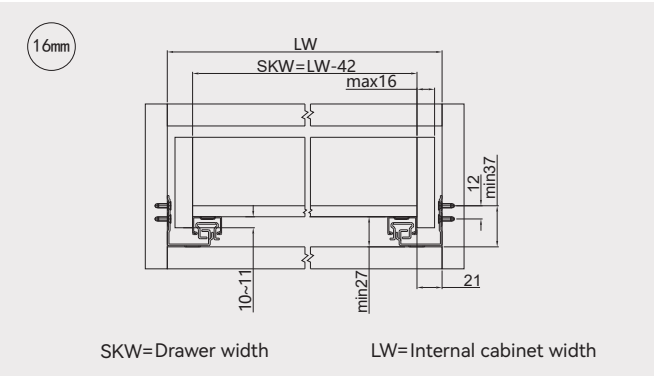

Soft-closing drawer

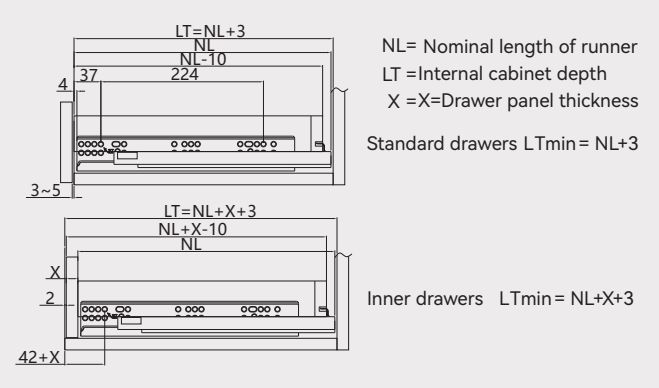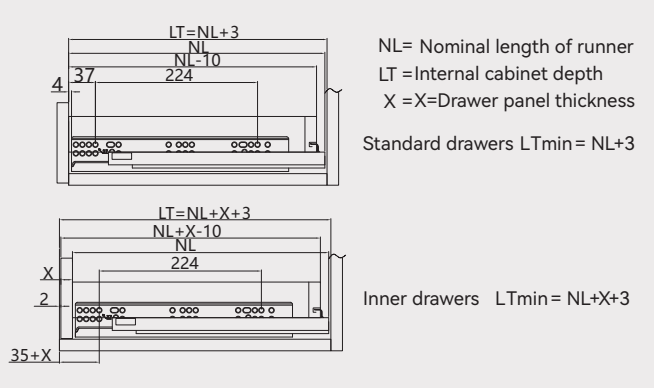

Drilling hole dimensions

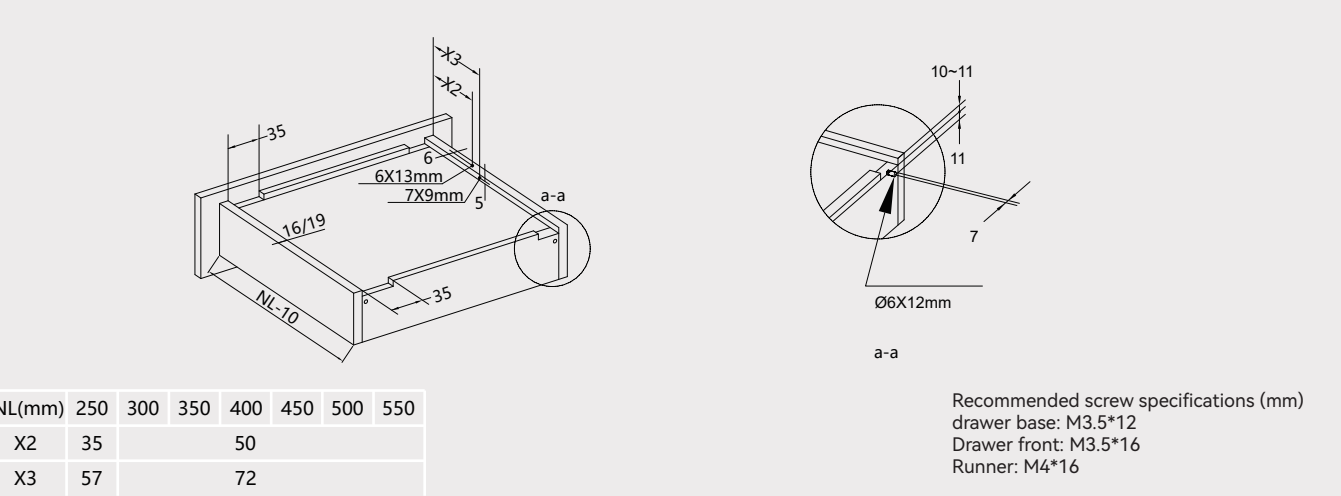


AS Series Face Frame Drawer

AS Series Synchronized Full extension concealed runner (w/ rear mounting bracket)




Special Features:

- Load capacity: 35kg
- Length: 305-610mm
- One-way extension
- Tool-free drawer assembly and removal of drawer of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer side adjustment:±1.5mm
- Drawer height adjustment:0~+3mm
- Drawer depth adjustment:+2mm

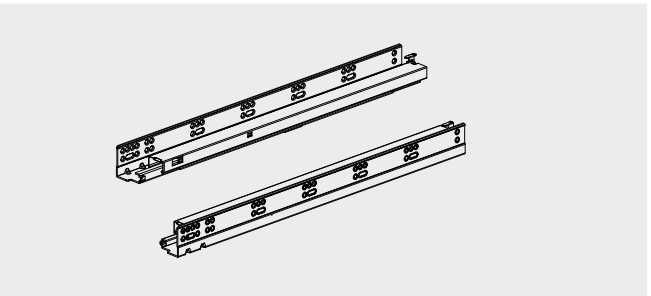

AS series Synchronized Full extension concealed runner (w/rear mounting bracket)		
Nominal length	Soft-closing drawer Item No.	Syn Push-open drawer Item No.
305mm	TC301HGE-305E1/AS	TC301HGE-305E7/AS
381mm	TC301HGE-381E1/AS	TC301HGE-381E7/AS
457mm	TC301HGE-457E1/AS	TC301HGE-457E7/AS
533mm	TC301HGE-533E1/AS	TC301HGE-533E7/AS
610mm	TC301HGE-610E1/AS	TC301HGE-610E7/AS


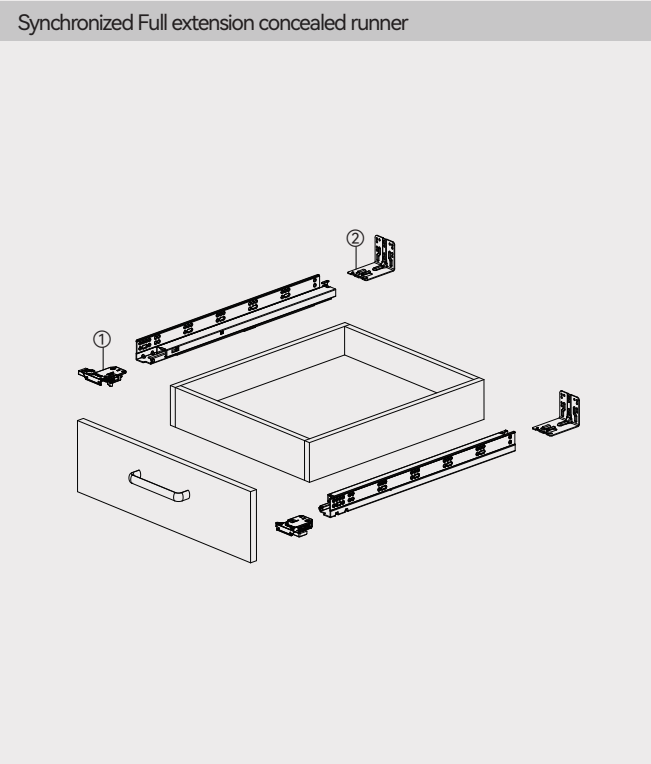


	① Locking device
Item No.: TC-CL/HGE-3D	


Runner installation dimensions	
	Nominal length
	305(12")
	381(15")
	457(18")
	533(21")
	610(24")

	② Face frame drawer runner metal rear mounting bracket
Item No.: TC-TS/001M	

Runner installation specification (mm)

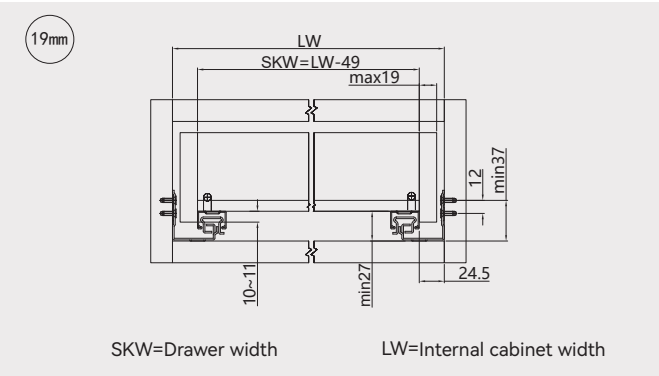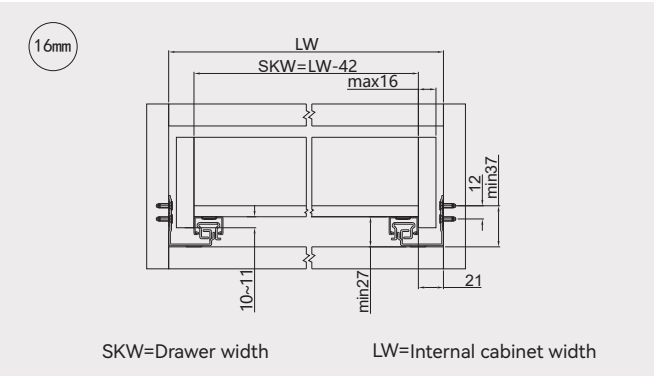


Soft-closing drawer


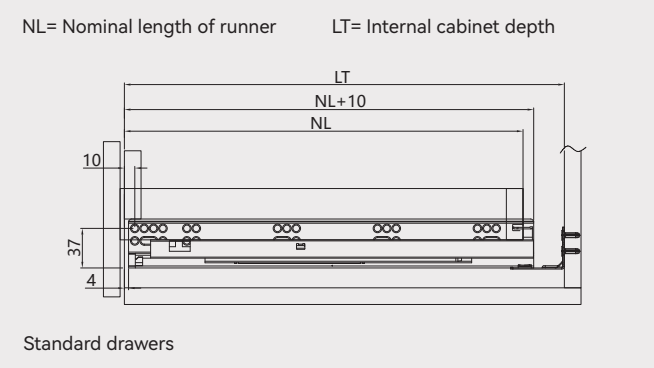


Drawer length	Slide length	LT	
		Max	Min
305(12")	315(12 1/2")	369(14 3/4")	326(12 7/8")
381(15")	391(15 1/2")	446(17 9/16")	403(15 7/8")
457(18")	467(18 1/2")	522(20 9/16")	479(18 7/8")
533(21")	543(21 1/2")	598(23 9/16")	555(21 7/8")
610(24")	620(24 1/2")	675(26 9/16")	632(24 7/8")

Metal rear mounting bracket specification (mm)

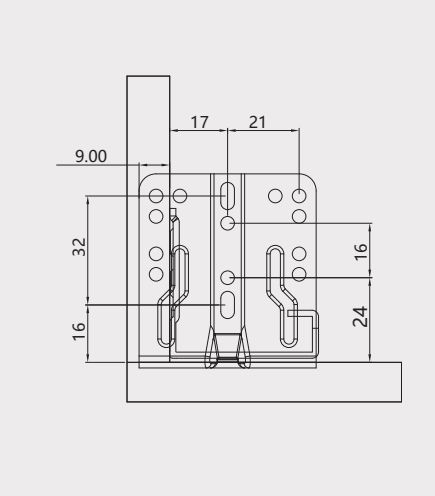

Drawer assembly

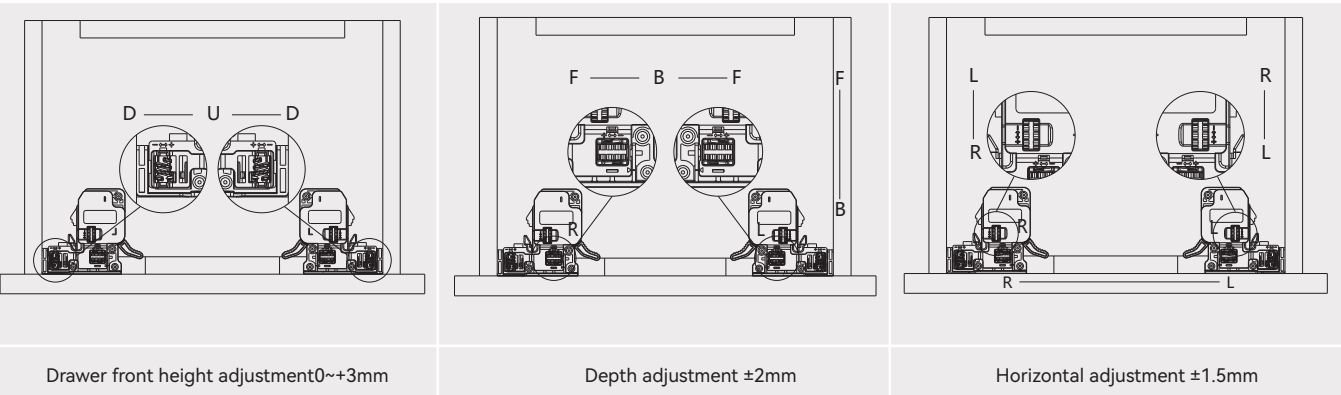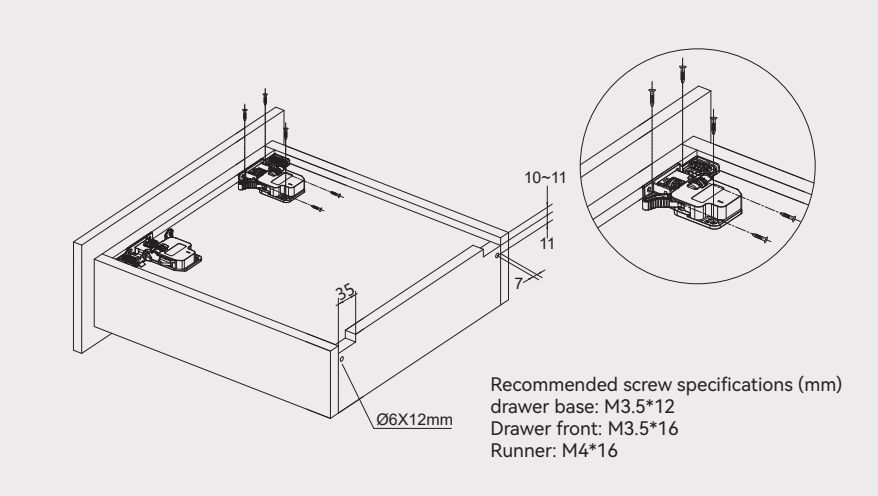

*Side adjustment ±1.5mm (Condition: Drawer width is within tolerance)

E-AS Series Face Frame Drawer

E-AS Synchronized Full extension concealed runner (side mounting)




Special Features:


- Load capacity: 35kg
- Length: 305-610mm
- One-way extension
- Tool-free drawer assembly and removal of drawer
- Silent mechanism ensuring runner smoothness without noise
- Drawer side adjustment:±1.5mm
- Drawer height adjustment:0~+3mm
- Drawer depth adjustment:+2mm



E-AS Synchronized full extension undermount slide (Side mount)				
Nominal length	Soft-closing drawer Item No.	Push-open drawer Item No.	Syn Push-open drawer Item No.	
305mm	TC301HGE-305E1/E-AS	TC301HGE-305E7/E-AS	TC301HGE-305E7S/E-AS	
381mm	TC301HGE-381E1/E-AS	TC301HGE-381E7/E-AS	TC301HGE-381E7S/E-AS	
457mm	TC301HGE-457E1/E-AS	TC301HGE-457E7/E-AS	TC301HGE-457E7S/E-AS	
533mm	TC301HGE-533E1/E-AS	TC301HGE-533E7/E-AS	TC301HGE-533E7S/E-AS	
610mm	TC301HGE-610E1/E-AS	TC301HGE-610E7/E-AS	TC301HGE-610E7S/E-AS	


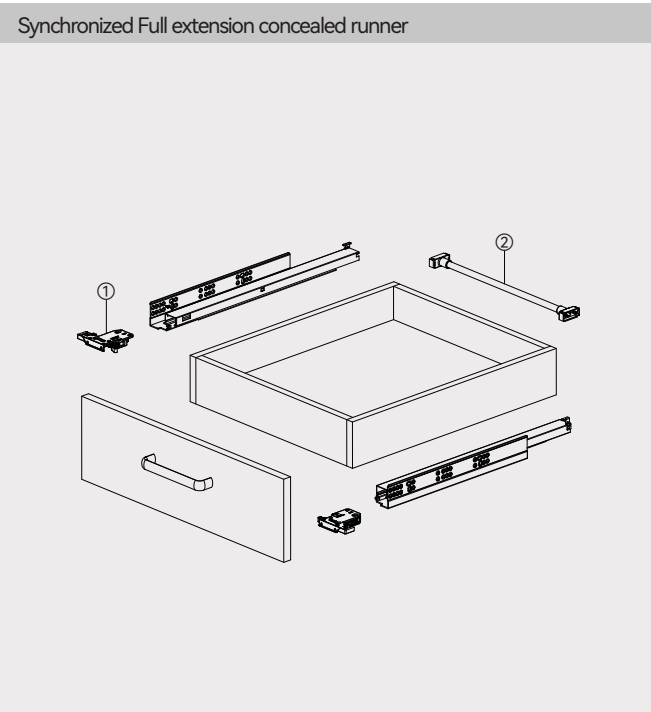


	① Locking device
	Item No.: TC-CL/HGE-3D

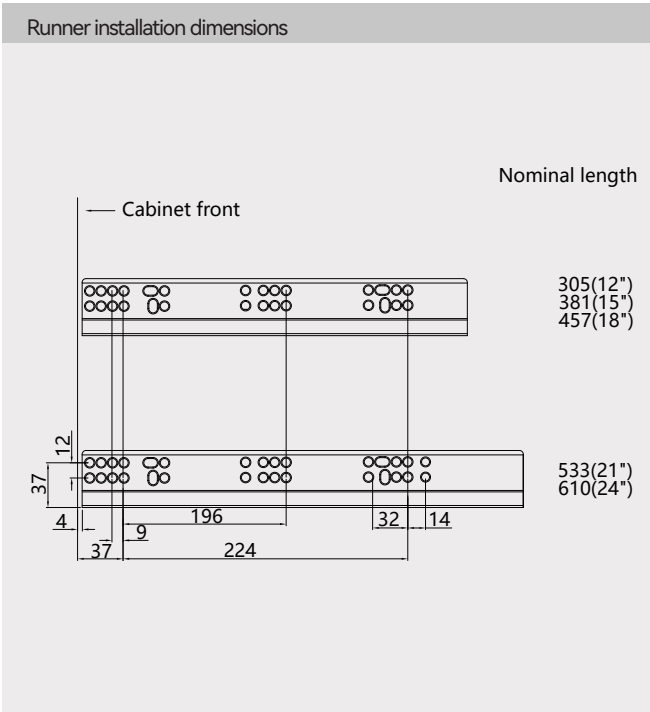


	② Synchronized Push-open aluminum cross bar
	Item No.: TC/AL-E7SN-2000
	MDF 16mm - cutting dimensions=LW-178
	MDF 19mm - cutting dimensions=LW-184


Runner installation specification (mm)

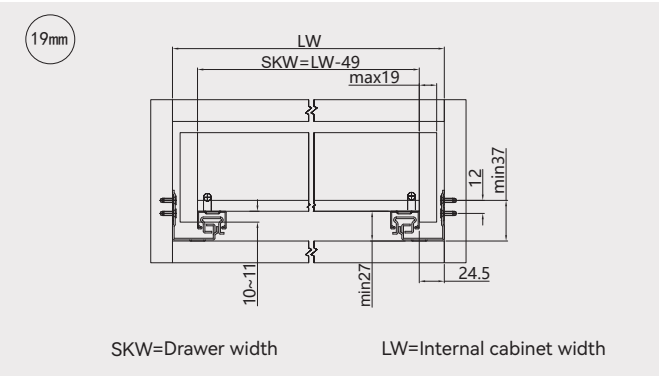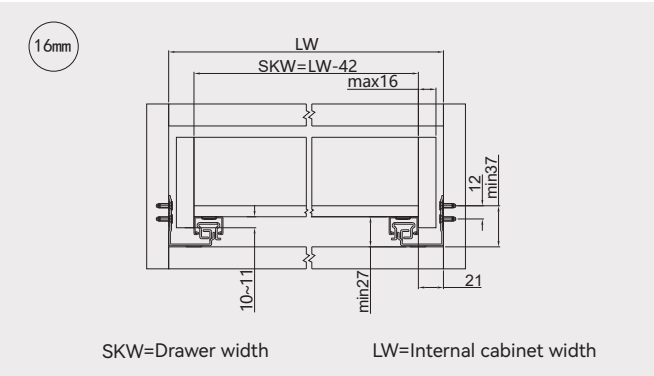


Soft-closing drawer

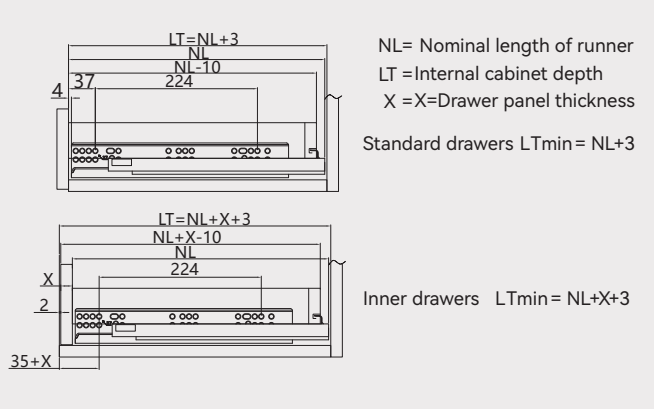


Push-open drawer

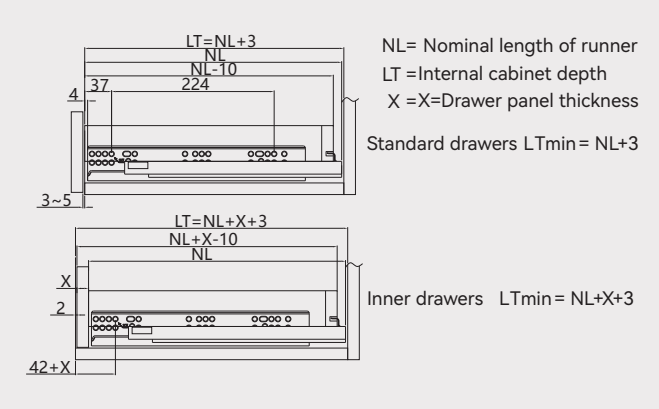

Drilling hole dimensions

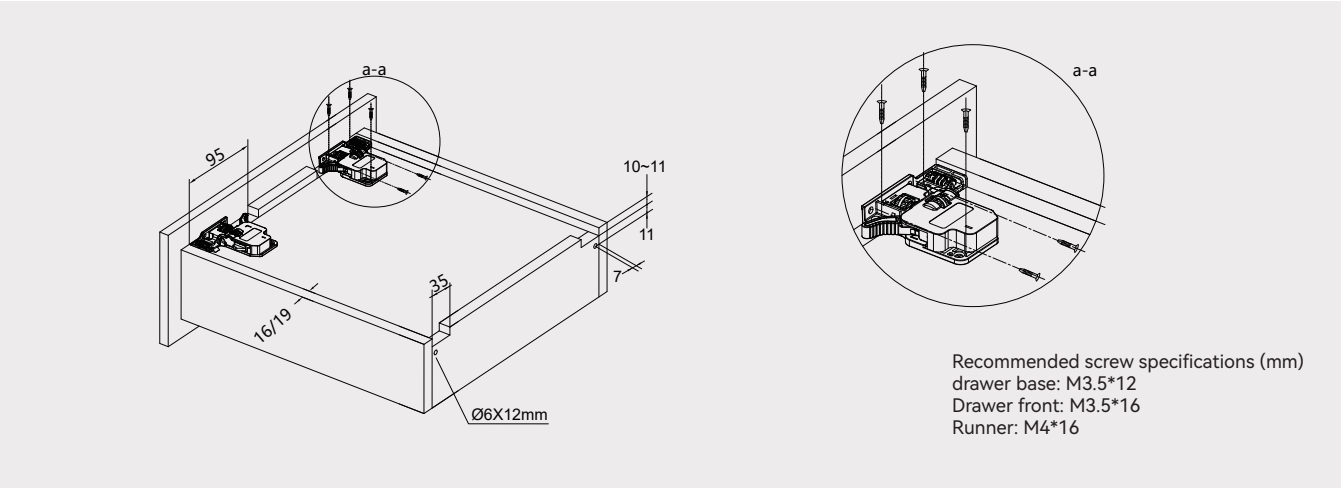

Recommended screw specifications (mm)
drawer base: M3.5*12
Drawer front: M3.5*16
Runner: M4*16

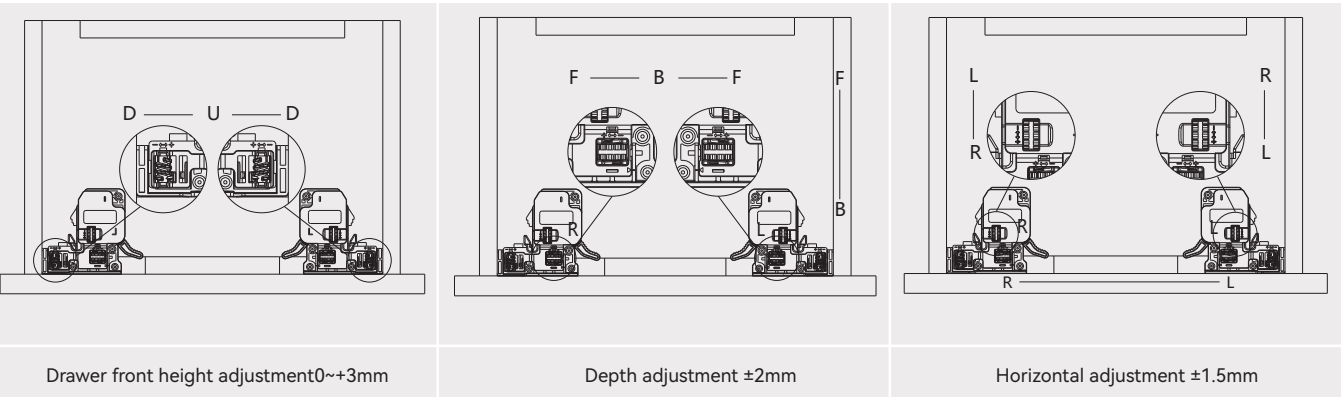

*Side adjustment ±1.5mm (Condition: Drawer width is within tolerance)